



# SPECIFICATION KOZ CABLE CLAMP SFHC 23-28

<b>Range:</b>	For cables with a nominal outer diameter of 23 up to 28 mm.
<b>Material:</b>	Black polyamide (PA66), fibreglass-reinforced, virgin material.
<b>Fire resistance:</b>	UL94 V-0 and classification standard DIN 5510-2:2009 with flammability class S3, smoke SR2 and dripping ST-2.
<b>Standards:</b>	Certified in accordance with the international standard NEN-EN-IEC 61914:2016.
<b>Temperature:</b>	Permanent application from -80°C to +85°C.
<b>Advantages:</b>	Resistant to oils, greases, frost, heat, UV, ozone, salt water, salts, acids, aggressive chemicals and radioactive radiation. Non-oxidizing, non-corrosive, non-magnetic and non-conductive. Halogen-free and no sharp edges. Lifetime warranty, easy assembly and available worldwide.
<b>Extra possibilities:</b>	The SFHC cleat is designed for an easy installation of small cables, such as a grounding cable, with our KOZ® cable clamps and blocks.

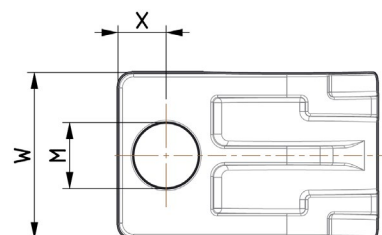

Initial torque for fastening fixing material : 5 – 8 Nm.  
(depends on cable manufacturer's prescription).

Tests have been performed by KEMA, SGS, KU Leuven, UL and Schneider.

The product listed in this datasheet is produced in conformity with the latest EU Directive 2011/65 / EU (RoHS), and complies with all legal obligations in accordance with REACH.

## DIMENSIONS IN MILLIMETERS

Type	DØ	M	L	H min.	H max.	W	X
KOZ SFHC 23-28-08	23-28	M8	51	38	43	36	10
KOZ SFHC 23-28-10	23-28	M10	51	38	43	36	10
KOZ SFHC 23-28-12	23-28	M12	51	38	43	36	10
KOZ SFHC 23-28-14	23-28	M14	51	38	43	36	10