



# SPECIFICATION KOZ CABLE CLAMP SFHC 28-34

<b>Range:</b>	For cables with a nominal outer diameter of 28 up to 34 mm.
<b>Material:</b>	Black polyamide (PA66), fibreglass-reinforced, virgin material.
<b>Fire resistance:</b>	UL94 V-0 and classification standard DIN 5510-2:2009 with flammability class S3, smoke SR2 and dripping ST-2.
<b>Standards:</b>	Certified in accordance with the international standard NEN-EN-IEC 61914:2016.
<b>Temperature:</b>	Permanent application from -80°C to +85°C.
<b>Advantages:</b>	Resistant to oils, greases, frost, heat, UV, ozone, salt water, salts, acids, aggressive chemicals and radioactive radiation. Non-oxidizing, non-corrosive, non-magnetic and non-conductive. Halogen-free and no sharp edges. Lifetime warranty, easy assembly and available worldwide.
<b>Extra possibilities:</b>	The SFHC cleat is designed for an easy installation of small cables, such as a grounding cable, with our KOZ® cable clamps and blocks.

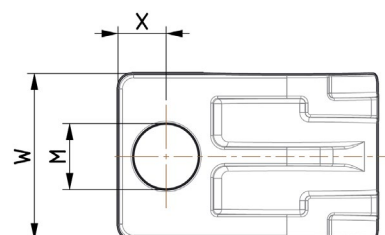

Initial torque for fastening fixing material : 5 – 8 Nm.  
(depends on cable manufacturer's prescription).

Tests have been performed by KEMA, SGS, KU Leuven, UL and Schneider.

The product listed in this datasheet is produced in conformity with the latest EU Directive 2011/65 / EU (RoHS), and complies with all legal obligations in accordance with REACH.

## DIMENSIONS IN MILLIMETERS

Type	DØ	M	L	H min.	H max.	W	X
KOZ SFHC 28-34-08	28-34	M8	56	43	49	36	10
KOZ SFHC 28-34-10	28-34	M10	56	43	49	36	10
KOZ SFHC 28-34-12	28-34	M12	56	43	49	36	10
KOZ SFHC 28-34-14	28-34	M14	56	43	49	36	10